



PopUp


PopUp Sorting Module



PopUp Sortation System

Modular Performance for Intralogistics Excellence

Enhance your sorting operations with our PopUp Module, a middle-range sortation system designed for superior versatility, modularity, and efficient flow management. Its adaptable structure allows seamless integration into both complete intralogistics systems and standalone applications. The PopUp Module ensures smooth, reliable, and consistent parcel redirection—maximizing operational uptime, optimizing flow, and supporting scalable logistics.

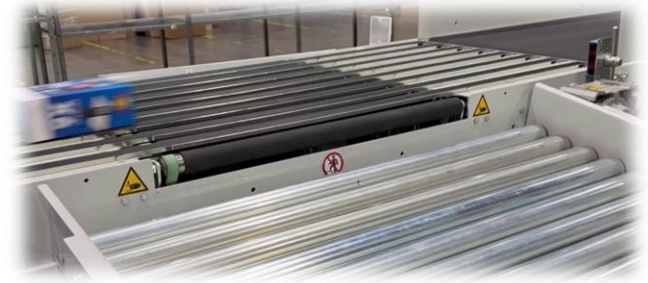

Key Advantages:

- ✓ **Versatile Parcel Handling** – Efficiently manages parcels of various sizes with consistent precision.
- ✓ **Smooth and Gentle Redirection** – Ideal for fragile and non-standard packages.
- ✓ **Modular and Compact Design** – Easily integrates into a wide range of layouts.
- ✓ **Optimized Flow Management** – Supports steady throughput and smooth logistics processes.
- ✓ **Electric and Pneumatic Versions Available** – Flexible configurations to suit different operational and energy requirements.
- ✓ **Flexible Sorting Logic** – Adaptable to diverse operational needs and configurations.
- ✓ **Durable and Low-Maintenance** – Built for long-term reliability with minimal service requirements.
- ✓ **Energy-Efficient Operation** – Designed to reduce consumption and promote sustainability.

From distribution centers to e-commerce and omnichannel logistics, the PopUp Module delivers scalable, efficient performance across a wide range of applications.

Upgrade your logistics system with cutting-edge sorting technology where precision meets performance

TECHNICAL DATA		
Parcels dimension (L x W x H)	Min150 x 100 x 5 mm	Max 1200 x 800 x 800 mm
Parcels weight	Min100 g	Max 50 kg
Parcels type	Boxes, polybags	
Linear Speed	Conveyor Speed	Up to 2 m/s
Transmission	Double Gearmotor (rollers and belt individual)	
Side guide	Double side	200, 300, 400
Surface under belt	Galvanised steel, Inox	
Inverter	Optional	Profinet / EtherCAT
Conveyor Length (after Wheels)	Customizable	From 800 mm to 2 mt
Number of Rollers (each unit)	Min 7	Max 12

MARV srl

Via Kennedy 30 – 20826 Misinto (MB) – Italy

T. +39 0285689726 - commerciale@marv-automation.com

www.marv-automation.com